



## CableServ Return Transmitter for Scientific Atlanta® 694\* Series Optical Nodes

### Product Description

CableServ® offers a series of Return Path transmitter modules for Scientific Atlanta 694\* and GainMaker® Optical Nodes.

The Return Transmitters are offered in DFB 1310nm and 1550nm, as well as 1470 to 1610nm ITU CWDM wavelengths.

### Applications

- Replacement Return TX Modules.
- Upgrade of Fabry-Perot to DFB return transmitters for launch of Telephony.
- CWDM Modules for multiplexing upstream data on a single fiber.

These high performance return transmitters perform equal to or better than the original manufacturer's products. For Cable Operators launching Telephony, CableServ offers DFB return transmitters that directly replace the original low performance Fabry-Perot devices, offering increased performance.

In traditional data transmission, the overloading of a return transmitter can result in laser clipping and lost data packets forcing a request to re-transmit data. With Digital Telephone Services laser clipping and the resulting lost data packets may result in dropped telephone calls. For this reason many CATV operators are upgrading to better performing DFB return transmitters.

CableServ also offers CWDM (Coarse Wavelength Division Multiplexing) Technology Return Modules. These are an ideal solution when there is no additional fiber at the node, yet the node is required to be segmented. CWDM allows the combining of multiple return paths. The individual node segments are modulated on to individual return lasers and multiplexed onto a single fiber.

### Product Features

**RF Test Point**

**DC Test Point scaled to Transmit Power**

**Plug-in Attenuator**

**LED Indicators for DC Power and Transmit Power**

**Low Power Consumption**

**Standard (6940, Gainmaker) and High Gain (6940/42 CWDM and Segmentation, 6944)**

**Versions**

**Two Year CableServ Warranty**




## SA 694\* NODE REVERSE TRANSMITTER

PARAMETER	Notes	Units	
Technology			DFB Uncooled
Wavelength		nm	1310
Wavelength: WDM Models		nm	1550
Wavelength: CWDM Models (ITU Grid)		nm	1470-1610
Passband		MHz	5-200
Frequency Response		+/- dB	0.5
Input return Loss		dB	-16
Optical Output Power		mW	2
Optical Test Point		VDC	1V/mW
RF Test Point		dB	-20 +/-0.5
Return Path NPR @ 41 dB C/(N+IM)	1	dB	see plot
Optical Connector	2		SC/APC

**NOTES:**

1. Typical NPR with 10dB Optical Link (21km Fiber and 3dB Passive loss)
2. Other connector types available on special order.

### STANDARD AND HIGH GAIN 694\*LASER NPR

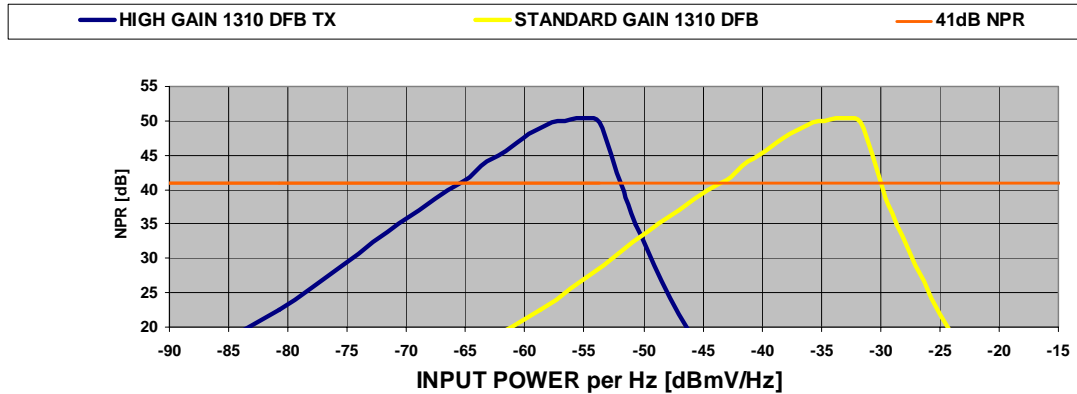

PRODUCT NAME	ORDER NUMBER
CS RTX SA 694X 1310 DFB SG	824-308-250-OCE
CS RTX SA 694X 1310 DFB HG	824-308-252-OCE
CS RTX SA 694X 1550 DFB SG	824-308-254-OCE
CS RTX SA 694X 1550 DFB HG	824-308-256-OCE
CS RTX SA 694X 1470 CWDM HG	824-308-261-OCE
CS RTX SA 694X 1490 CWDM HG	824-308-262-OCE
CS RTX SA 694X 1510 CWDM HG	824-308-263-OCE
CS RTX SA 694X 1530 CWDM SG	824-308-264-OCE
CS RTX SA 694X 1530 CWDM HG	824-308-265-OCE
CS RTX SA 694X 1550 CWDM SG	824-308-266-OCE
CS RTX SA 694X 1550 CWDM HG	824-308-267-OCE
CS RTX SA 694X 1570 CWDM HG	824-308-268-OCE
CS RTX SA 694X 1590 CWDM HG	824-308-269-OCE
CS RTX SA 694X 1610 CWDM HG	824-308-270-OCE



**CableServ Inc.**  
 4560 Eastgate Parkway  
 Mississauga, Ontario, Canada L4W 3W6  
 Telephone: (905) 629-1111  
 Fax: (905) 629-1115  
 Toll Free: 800-668-2033  
 E-mail to: [inquiries@cableserv.com](mailto:inquiries@cableserv.com) Visit us at [www.cableserv.com](http://www.cableserv.com)